

MODEL TL-4932



International size reference: 2/3D, ER32L41

TECHNICAL DATA (Preliminary)

(Typical values @ +25°C for batteries stored for one year or less)



■ Nominal capacity @ 2 mA, to 2V	12 Ah
■ Rated voltage	3.6 V
■ Max. pulse to 3V @ 125µA (ave. current)	100 mA
■ Weight	63.0g (2.22 oz)
■ Volume	35 cc
■ Operating temperature range	-55°C to +85°C
■ U.L. Component Recognition	Pending

TADIRAN LITHIUM BATTERIES

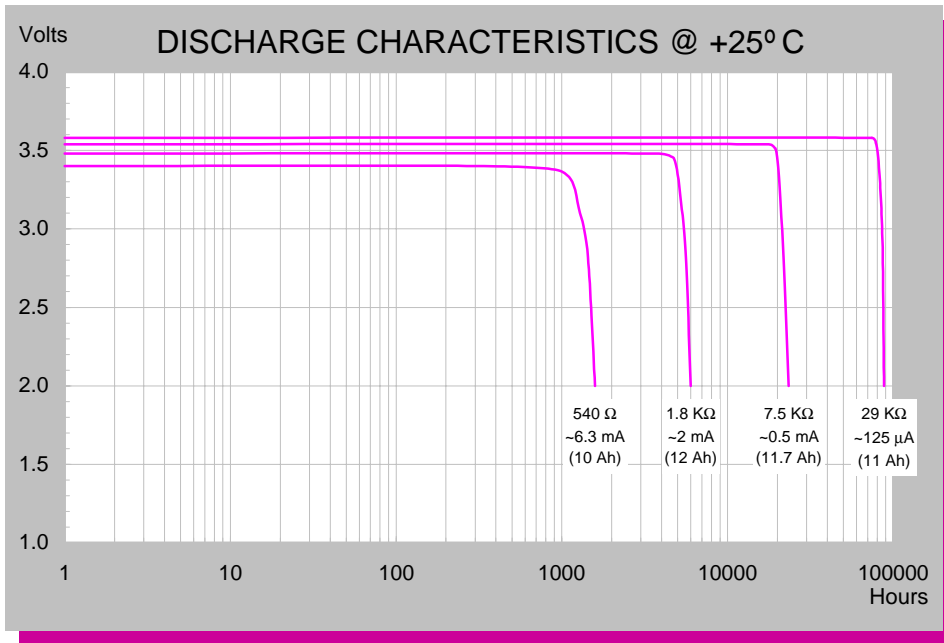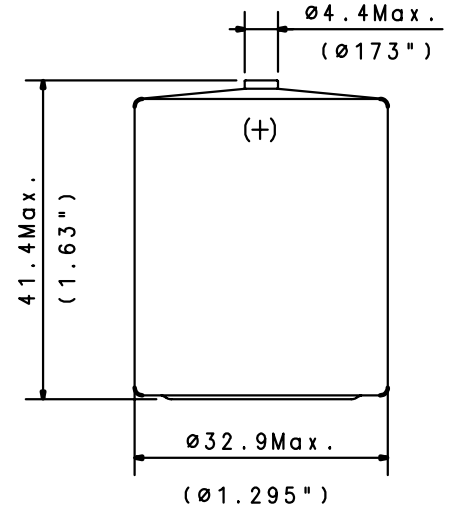

ADDITIONAL INFORMATION

TERMINATION SUFFIX- /S	PRESSURE CONTACTS
TERMINATION SUFFIX- /T	SOLDER TABS
CATALOGUE NO. : /S	15-4932-21000
CATALOGUE NO. : /T	15-4932-31000

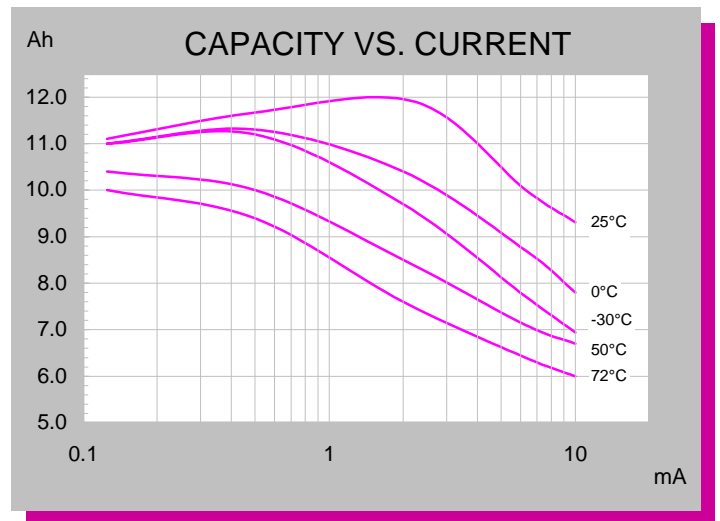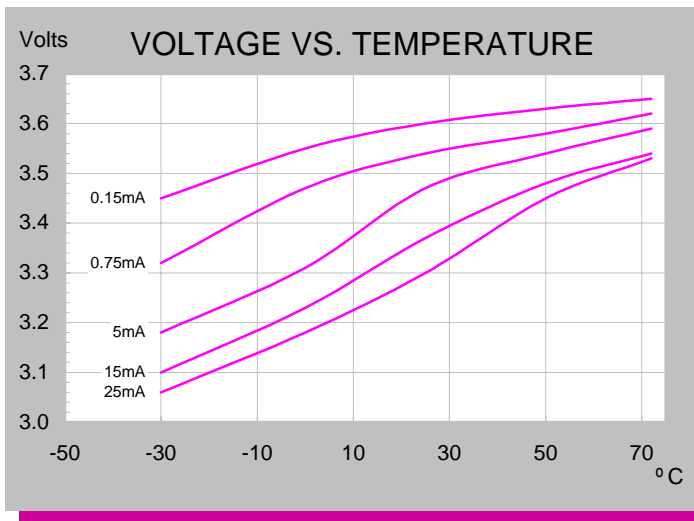

XOL - Extended Operating Life

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance.

Rev. A 05/01